



AVK HANDWHEEL, CTC

08/A

Fitting all standard gate valves and service connection valves

004

For manual operation of AVK gate valves and AVK service connection valves AVK recommends usage of our handwheels. AVK handwheels are of grey cast iron GJL-250 (GG-25) with epoxy coating to DIN 30677.


Product Description:

Handwheel assembled with bolt and washer

Features:

- Handwheel for service connection valves in black epoxy
- Handwheel for gate valves in blue epoxy



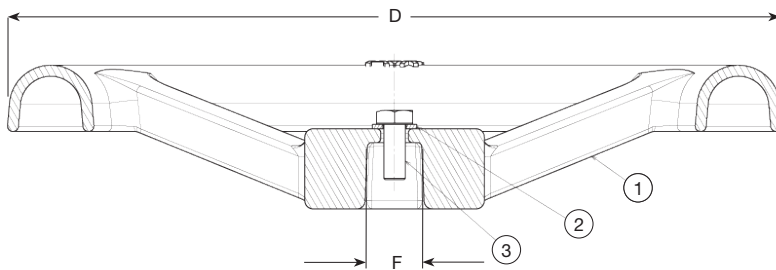

Component List:

| | | | |
|--------------|--------------------|-----------|--------------------|
| 1. Handwheel | Cast iron GJL-250 | 2. Washer | Stainless steel A2 |
| 3. Bolt | Stainless steel A2 | | |

Components may be substituted with equivalent or higher class materials without prior notification.

Reference Nos. and Dimensions:

| AVK ref. nos | DN/DN mm | D mm | F mm | Theoretical weight kg |
|------------------------------|-------------|---------|---------|--------------------------|
| 08-032-16 ⁽¹⁾ | 25 - 50 | 120 | 13 | 0.2 |
| 08-032-16-000 ⁽¹⁾ | 25 - 50 | 120 | 13 | 0.2 |
| 08-050-01-000 | 40 - 50 | 180 | 14 | 1.5 |
| 08-080-02-000 | 65 - 80 | 225 | 17 | 2.0 |
| 08-100-01-000 | 100 - 100 | 280 | 19 | 3.5 |
| 08-150-02-000 | 125 - 150 | 320 | 19 | 4.5 |
| 08-200-01-000 | 200 - 200 | 360 | 24 | 6.0 |
| 08-250-02-000 | 250 - 300 | 500 | 27 | 11 |
| 08-400-01-000 ⁽²⁾ | 350 - 500 | 640 | 32 | 17 |
| 08-600-01-000 ⁽³⁾ | 450 - 600 | 800 | Ø30 | 20 |
| 08-600-03-000 ⁽⁴⁾ | 450 - 600 | 800 | Ø40 | 20 |

⁽¹⁾ For service connection valves
⁽²⁾ Square stem
⁽³⁾ CTC, for series 06 and 46, ø30
⁽⁴⁾ CTC, ø40