





AVK SWING CHECK VALVES WITH BARE SHAFT PRESSURE LOSS, DN50, DN65, DN80 AND DN100



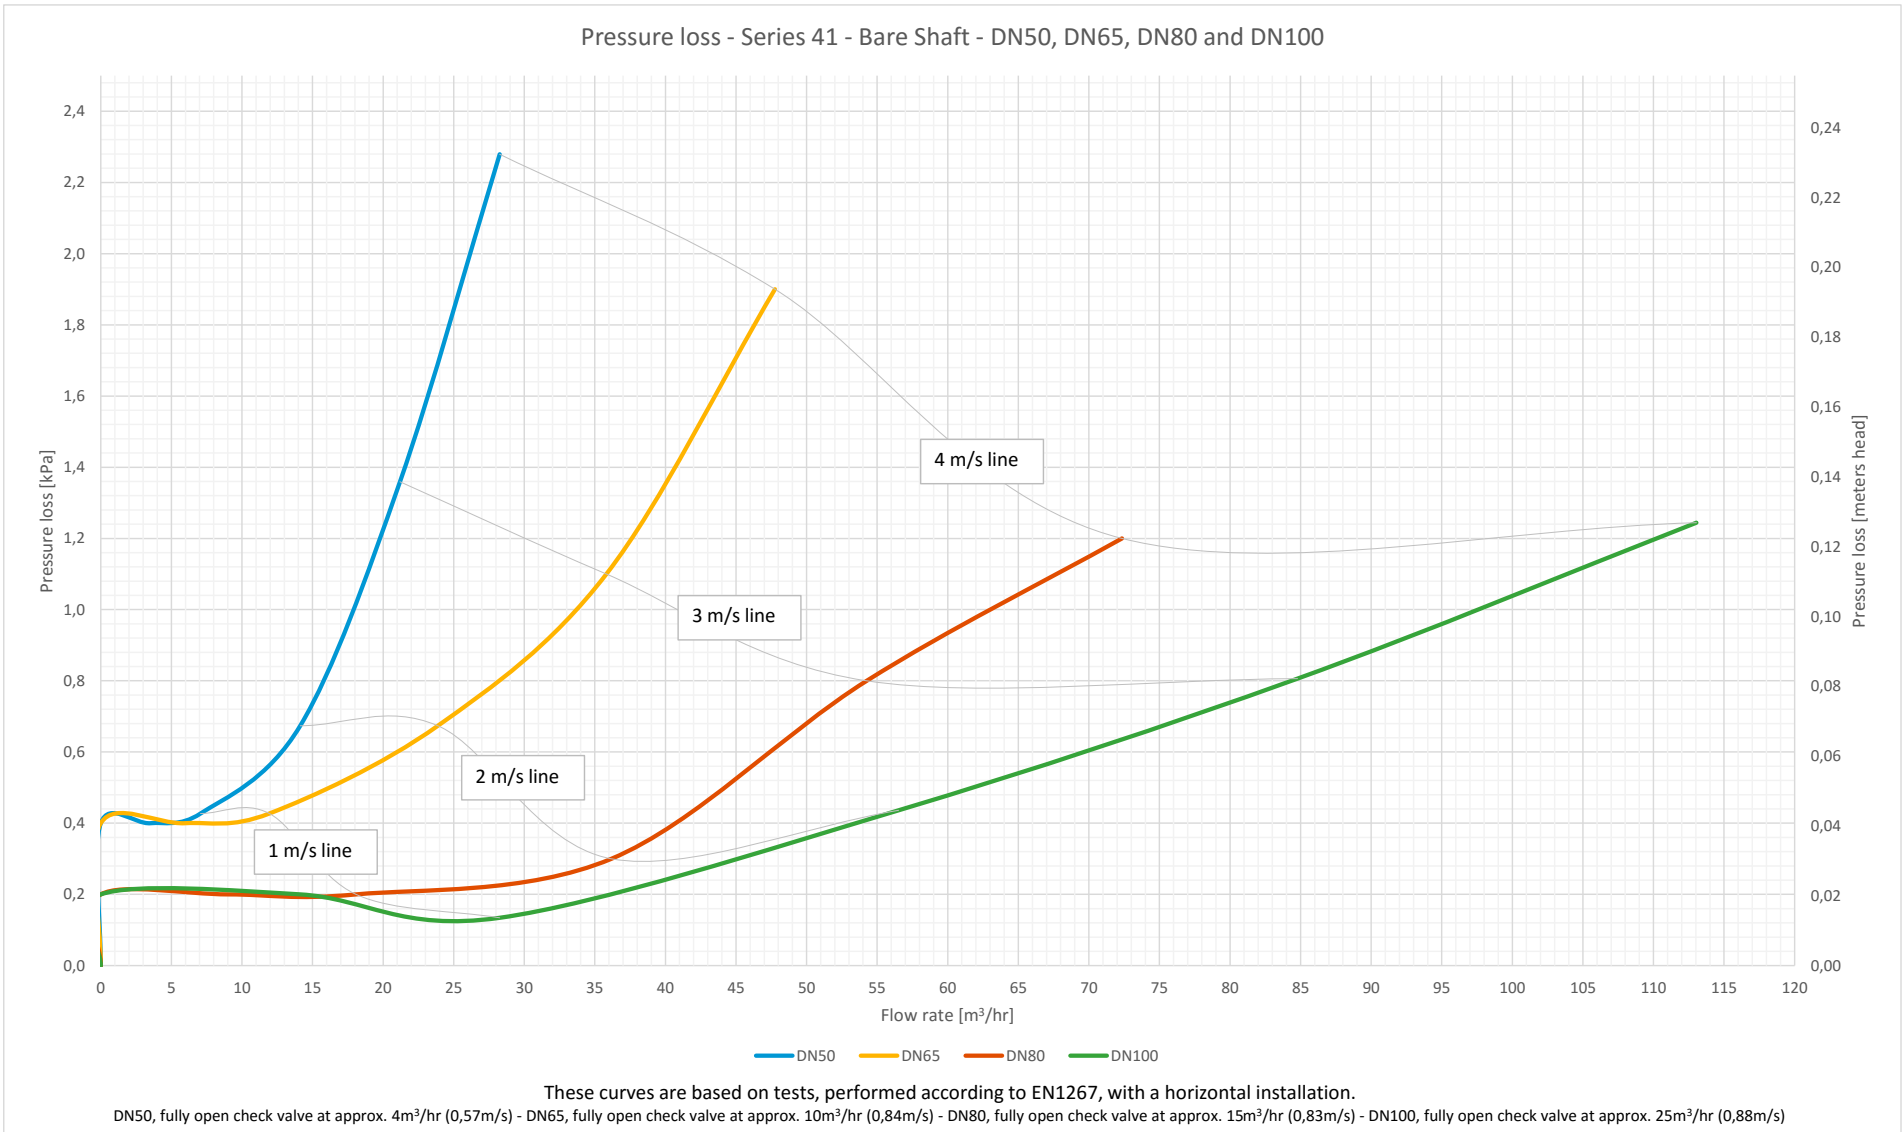

AVK SWING CHECK VALVES WITH BARE SHAFT PRESSURE LOSS, DN125, DN150 AND DN200

Pressure loss - Series 41 - Bare Shaft - DN125, DN150 and DN200

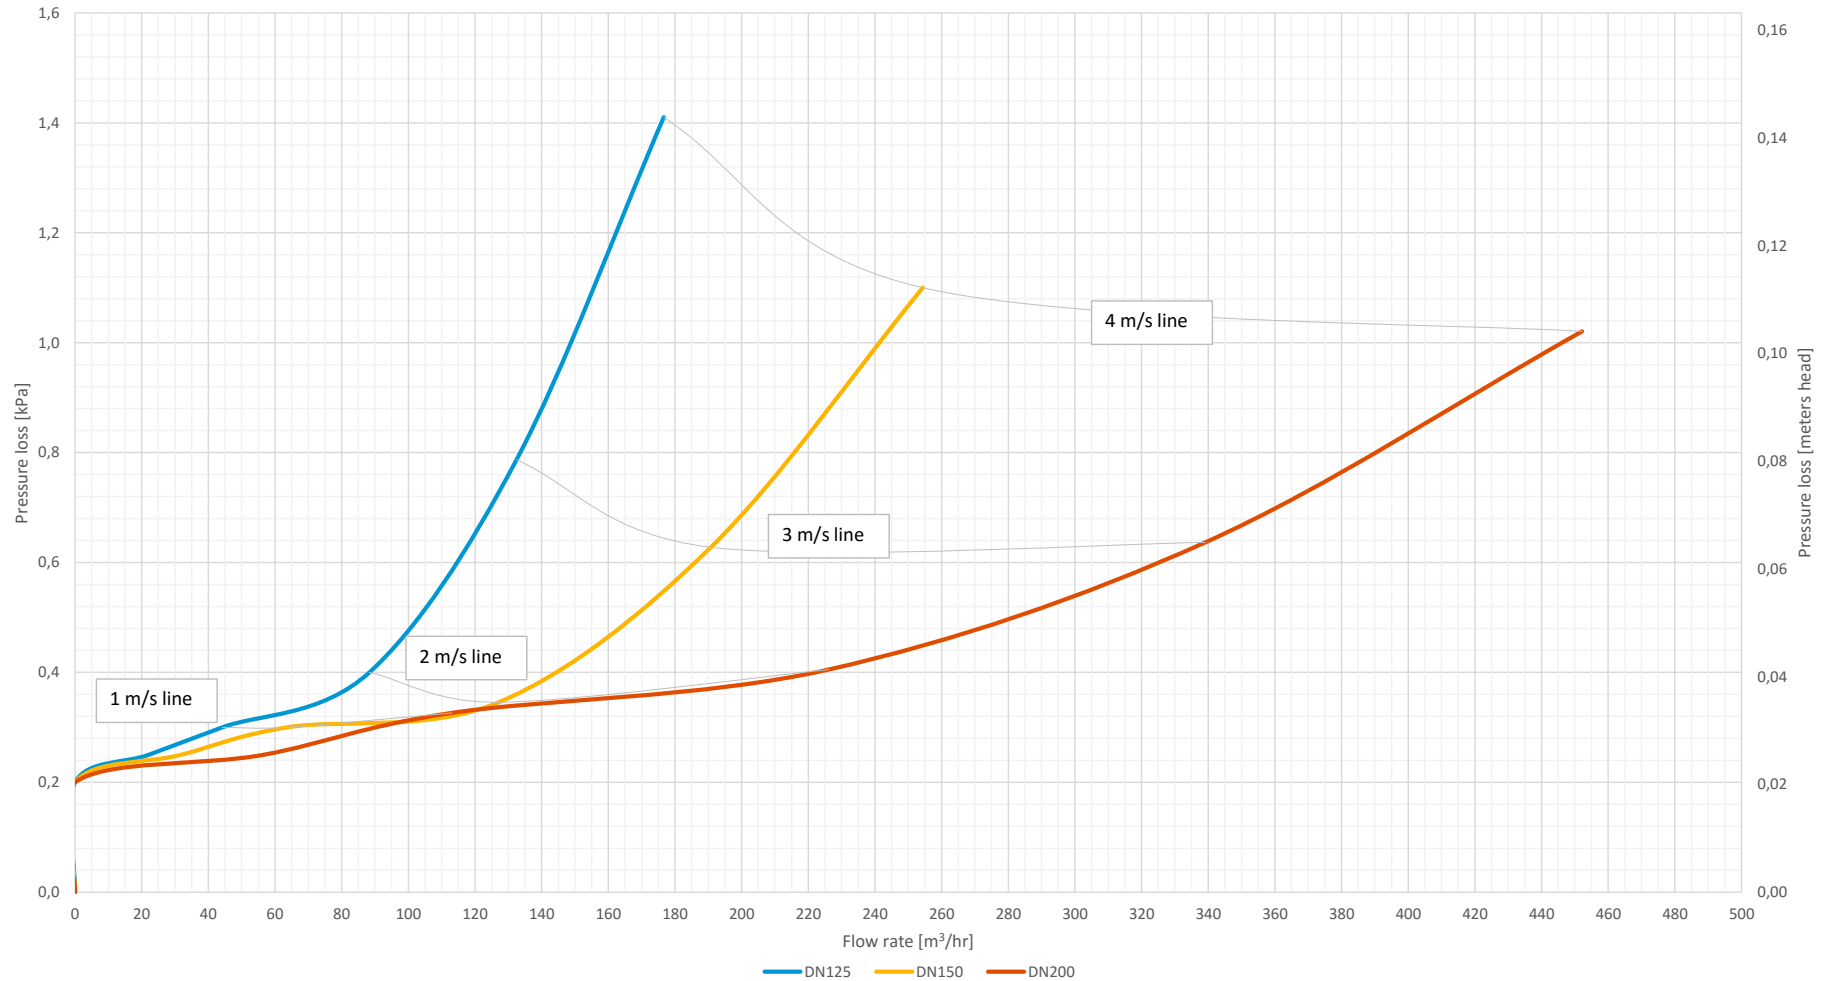


These curves are based on tests, performed according to EN1267, with a horizontal installation.
 DN125, fully open check valve at approx. 35m³/hr (0,79m/s) - DN150, fully open check valve at approx. 55m³/hr (0,86m/s) - DN200, fully open check valve at approx. 100m³/hr (0,88m/s)



AVK SWING CHECK VALVES WITH BARE SHAFT PRESSURE LOSS, DN250 AND 300

Pressure loss - Series 41 - Bare Shaft - DN250 and DN300

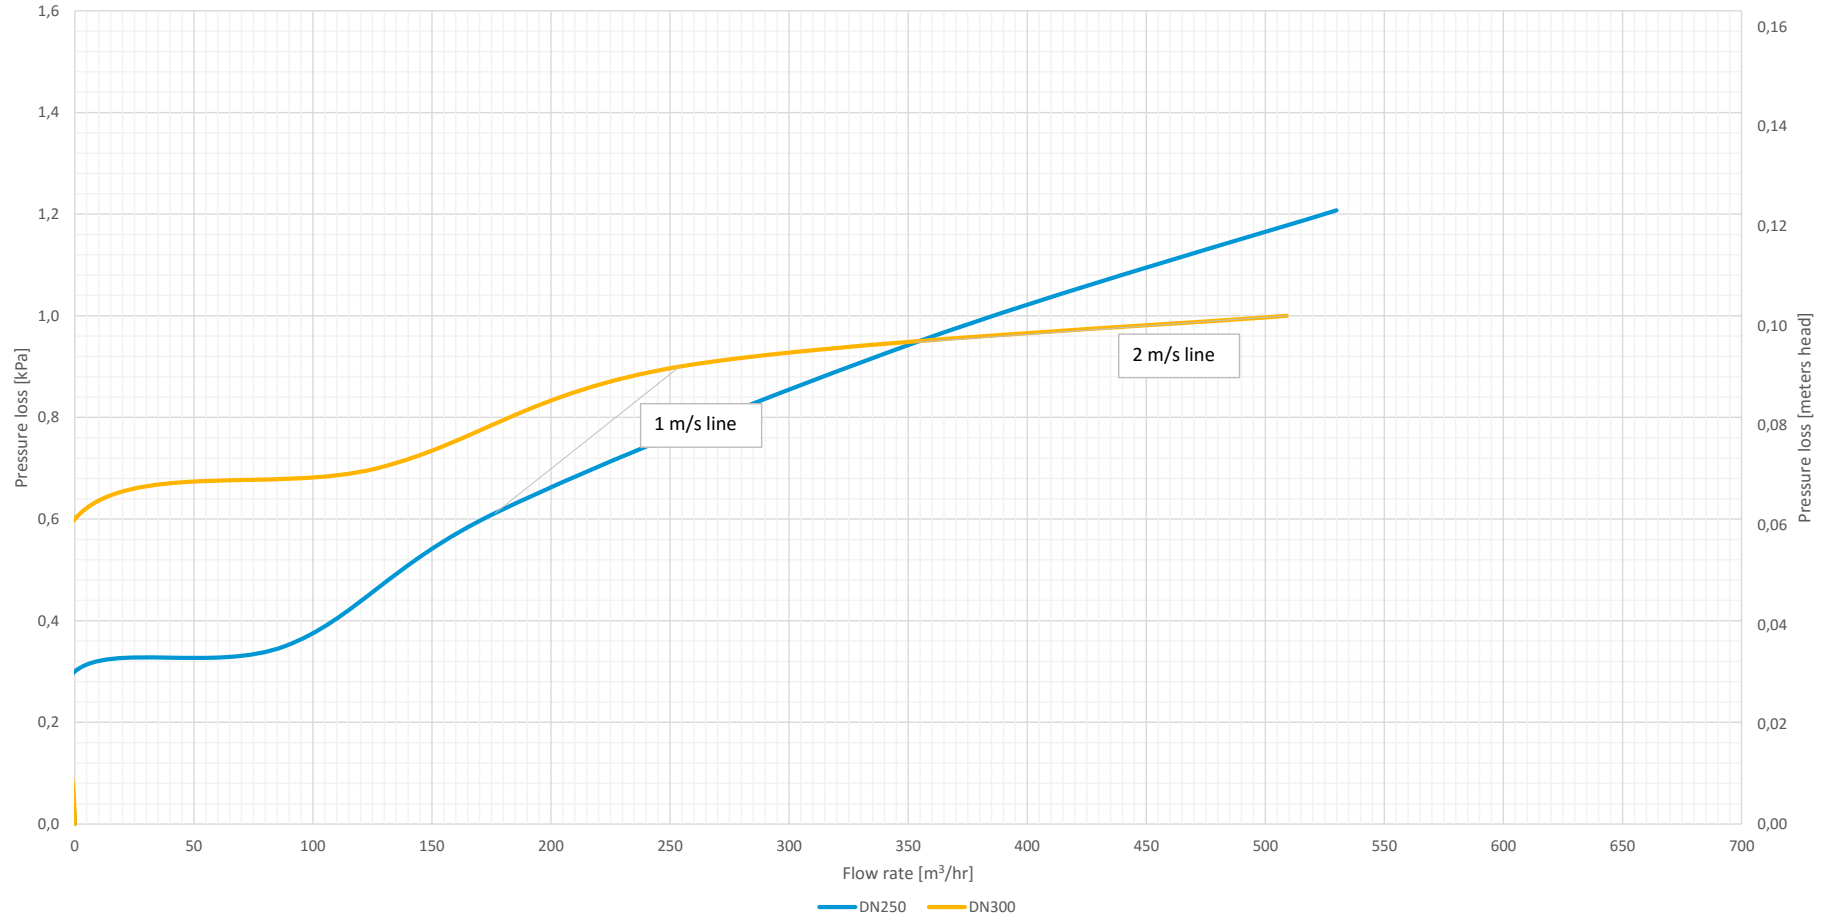

These curves are based on tests, performed according to EN1267, with a horizontal installation.
DN250, fully open check valve at approx. 130m³/hr (0,74m/s) - DN300, fully open check valve at approx. 180m³/hr (0,71m/s)